


**Refer to this guide after installing the AuxZiliary Kit as described in the AuxZiliary Kit Installation Guide.**

Scan this code or click for the step-by-step installation guide:

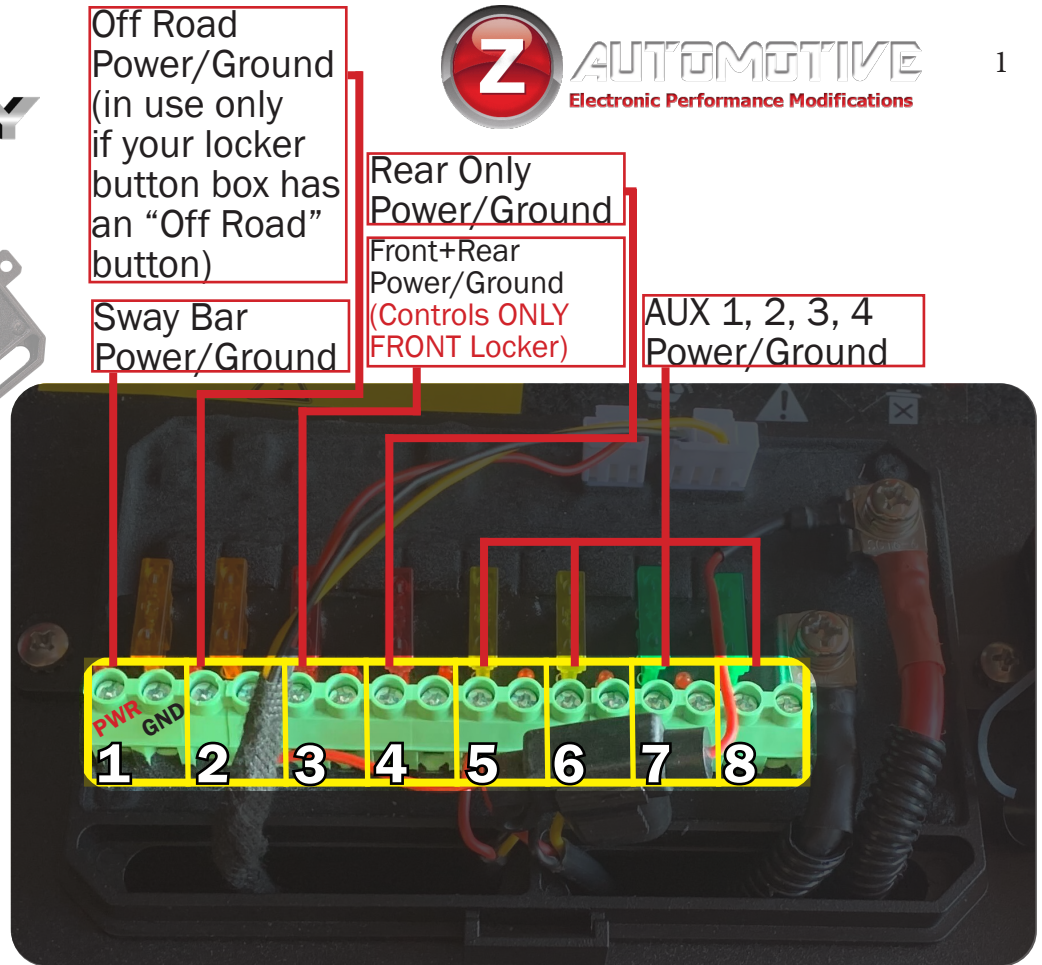

- The AuxZiliary Kit relay box has 8 relays total, with **power on the left** and **ground on the right**.
- Each relay is indicated by a rectangle and numbered, with the button that controls it labeled above.

**HOLD** the steering wheel button and **TAP** the AUX button whose behavior you'd like to modify.

**Lat:** Press to activate, press to deactivate

**Mom:** Hold to activate, release to deactivate

**+**: remember last state of button on start

**-**: button off on start

**Bat:** Works with ignition off

**lg(n):** Only works with ignition on

DashBoard Readout	Button Behavior
"Lat/Ig+"	Button Latched, Powered by Ignition, Recall Last State
"Lat/Ig-"	Button Latched, Powered by Ignition, Do Not Recall Last State
"Lat/Bat"	Button Latched, Powered by Battery
"Mom/Ign"	Button Momentary, Powered by Battery
"Mom/Bat"	Button Momentary, Powered by Battery

**These can also be changed from the UConnect AUX button menu once activated from the "Other" submenu of the Tazer JL Mini.**

**NOTE: MAKE SURE** the current draw of the device connected to each relay does not exceed the corresponding fuse's current rating. There are replacement fuses in the kit.

- **BE SURE TOTAL CURRENT DRAW DOES NOT EXCEED 60 AMPS.**
- **TARGET 1/2 OF THE FUSE RATING FOR CURRENT DRAW.**

**NOTE:** By default the Sway Bar button will act as an additional AUX relay. **For OEM Sway Bar button function, HOLD** the steering wheel button and **TAP** the **Sway Bar button** until you see "SB: AS OEM."

**NOTE:** The **Locker Button Bank** (Front+Rear, Rear, Off, Sway Bar) is disabled once the vehicle is **moving**.

**NOTE:** When using the relay board to disconnect lockers, the **dashboard MAY display a "SERV 4WD" error** until the lockers reconnect. **The only way around this error is to disable ALL locker messages on the dash. HOLD** the steering wheel button and **TAP** the **Locker OFF button** until you see "Lockers: NO." Set to "Lockers: YES" to reinstate messages.

Z Automotive cannot be held responsible misuse or consequential damages.

If you are in doubt, email [support@zautotech.com](mailto:support@zautotech.com).

Please be aware that modifying your vehicle in any way can affect your vehicle's warranty, longevity, handling, etc.

Please use with caution, and AT YOUR OWN RISK.

USING THE LIGHT SHOW FEATURE ON PUBLIC ROADS: IMPERSONATING A POLICE OFFICER IS A FELONY. LIGHT SHOW IS INTENDED FOR CAR SHOW/TRACK/OFF ROAD USE ONLY.

Z Automotive is in no way affiliated with FCA.

Protected by US Patents  
10,885,039; 10,759,328; 10,431,946; 10,266,102; 9,937,850; 9,849,826;  
and other patents pending.